





Model 208

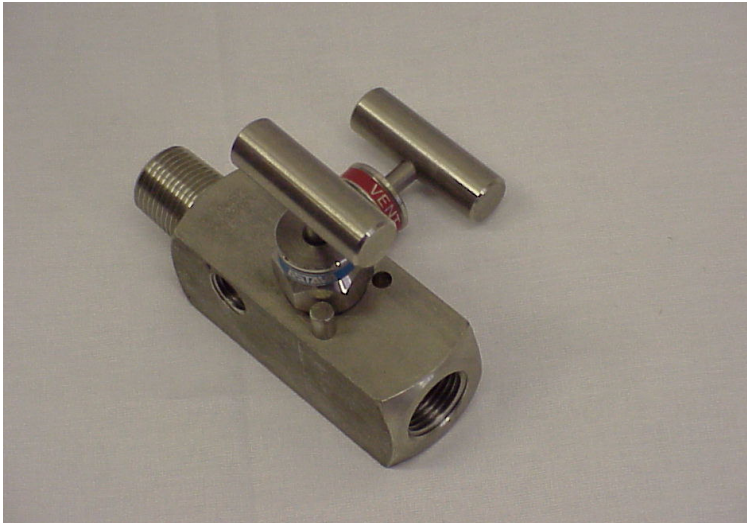

Picture model: 208-06
2-VALVE GAUGE MANIFOLD

Standard materials				
Body, Bonnet	AISI 316 L			
Needle point	Rotating ceramic ball Al ₂ O ₃			
Stem	AISI 316 Ti with chromium-carbide diffusion coating			
Connections				
Process	1/2-14 NPT (F)	ANSI / ASME B1.20.1		
Instrument	1/2-14 NPT (M)	ANSI / ASME B1.20.1		
Vent / Purge	1/4-18 NPT (F)	ANSI / ASME B1.20.1		
Stem packing	Code	P/T		Material
Teflon (PTFE)	xxx-01	413 barg 38 °C 6000 psig 100 °F	200 barg 230 °C 3000 psig 450 °F	AISI 316 (L)
VITON	xxx-06	600 barg 38 °C 9000 psig 100 °F	200 barg 200 °C 3000 psig 400 °F	AISI 316 (L)
Grafoil	xxx-05	413 barg 38 °C 6000 psig 100 °F	200 barg 400 °C 3000 psig 750 °F	AISI 316 (L)
Other packingmat.	Sillicon, Kalrez, Supagraf Premier, EPDM, Elast-o-lion			
Special alloys	Alloy 400	Alloy C-276	TITAN	DUPLEX 1.4462
Model	xxx-02	xxx-03	xxx-04	xxx-20
Stem packing	PTFE	PTFE	PTFE	VITON O-ring
	Alloy 825	Alloy 625	Alloy 254Smo (6M0)	
Model	xxx-12 (825)	xxx-12	xxx-11	Other on request
Stem packing	PTFE	PTFE	PTFE	
Optional				Add code
10.000 psi solution				xxx/10K-xx
All connections G-threaded 1/4				xxx/B14-xx
G-threaded connections				xxx/B -xx
MonelK500 (NACE compliance)				xxx-xx5
Mounting bracket				904, 906 or 906/P
Oxygen cleaned				xxx-xx/C
Vent 1/2"NPT F (standard is 1/4"NPT F)				xxx/V12-xx
Welded 1/2" OD process conenction				xxx/W1/2-xx
Brackets				Add code
Mounting bracket wall				906
Mounting bracket pipe				906/P

Model 208

